

**ST**(意法) BUL310FP **PDF**



**深圳创唯电子有限公司**

**<http://www.st-ic.com>**



## BUL310FP

### HIGH VOLTAGE FAST-SWITCHING NPN POWER TRANSISTOR

- STMicroelectronics PREFERRED SALESTYPE
- NPN TRANSISTOR
- HIGH VOLTAGE CAPABILITY
- LOW SPREAD OF DYNAMIC PARAMETERS
- MINIMUM LOT-TO-LOT SPREAD FOR RELIABLE OPERATION
- VERY HIGH SWITCHING SPEED
- FULLY CHARACTERIZED AT 125°C
- LARGE RBSOA
- FULLY MOLDED INSULATED PACKAGE
- 2000 V DC INSULATION (U.L. COMPLIANT)


#### APPLICATIONS

- HORIZONTAL DEFLECTION FOR COLOUR TV
- ELECTRONIC BALLASTS FOR FLUORESCENT LIGHTING
- FLYBACK AND FORWARD SINGLE TRANSISTOR LOW POWER CONVERTERS


#### DESCRIPTION

The BUL310FP is manufactured using high voltage Multi Epitaxial Planar technology for high switching speeds and high voltage capability. It uses a Cellular Emitter structure with planar edge termination to enhance switching speeds while maintaining a wide RBSOA.

The BUL series is designed for use in lighting applications and low cost switch-mode power supplies.

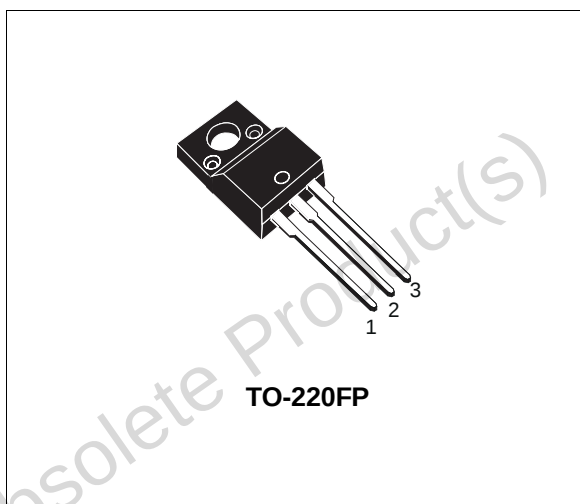

#### INTERNAL SCHEMATIC DIAGRAM



SC06960

#### ABSOLUTE MAXIMUM RATINGS

| Symbol    | Parameter                                  | Value      | Unit |
|-----------|--------------------------------------------|------------|------|
| $V_{CES}$ | Collector-Emitter Voltage ( $V_{BE} = 0$ ) | 1000       | V    |
| $V_{CEO}$ | Collector-Emitter Voltage ( $I_B = 0$ )    | 500        | V    |
| $V_{EBO}$ | Emitter-Base Voltage ( $I_C = 0$ )         | 9          | V    |
| $I_C$     | Collector Current                          | 5          | A    |
| $I_{CM}$  | Collector Peak Current ( $t_p < 5$ ms)     | 10         | A    |
| $I_B$     | Base Current                               | 3          | A    |
| $I_{BM}$  | Base Peak Current ( $t_p < 5$ ms)          | 4          | A    |
| $P_{tot}$ | Total Dissipation at $T_c = 25$ °C         | 36         | W    |
| $T_{stg}$ | Storage Temperature                        | -65 to 150 | °C   |
| $T_j$     | Max. Operating Junction Temperature        | 150        | °C   |

## BUL310FP

### THERMAL DATA


|                       |                                     |     |      |      |
|-----------------------|-------------------------------------|-----|------|------|
| R <sub>thj-case</sub> | Thermal Resistance Junction-Case    | Max | 3.5  | °C/W |
| R <sub>thj-amb</sub>  | Thermal Resistance Junction-Ambient | Max | 62.5 | °C/W |

### ELECTRICAL CHARACTERISTICS (T<sub>case</sub> = 25 °C unless otherwise specified)


| Symbol                           | Parameter                                                 | Test Conditions                                                                                                                                                                  | Min.    | Typ.       | Max.              | Unit        |
|----------------------------------|-----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------------|-------------------|-------------|
| I <sub>CES</sub>                 | Collector Cut-off Current (V <sub>BE</sub> = 0)           | V <sub>CE</sub> = 1000 V<br>V <sub>CE</sub> = 1000 V T <sub>j</sub> = 125 °C                                                                                                     |         |            | 100<br>500        | μA<br>μA    |
| I <sub>CEO</sub>                 | Collector Cut-off Current (I <sub>B</sub> = 0)            | V <sub>CE</sub> = 500 V                                                                                                                                                          |         |            | 250               | μA          |
| V <sub>CEO(sus)*</sub>           | Collector-Emitter Sustaining Voltage (I <sub>B</sub> = 0) | I <sub>C</sub> = 100 mA L = 25 mH                                                                                                                                                | 500     |            |                   | V           |
| V <sub>EBO</sub>                 | Emitter-Base Voltage (I <sub>C</sub> = 0)                 | I <sub>E</sub> = 10 mA                                                                                                                                                           | 9       |            |                   | V           |
| V <sub>CE(sat)*</sub>            | Collector-Emitter Saturation Voltage                      | I <sub>C</sub> = 1 A I <sub>B</sub> = 0.2 A<br>I <sub>C</sub> = 2 A I <sub>B</sub> = 0.4 A<br>I <sub>C</sub> = 3 A I <sub>B</sub> = 0.6 A                                        |         |            | 0.5<br>0.7<br>1.1 | V<br>V<br>V |
| V <sub>BE(sat)*</sub>            | Base-Emitter Saturation Voltage                           | I <sub>C</sub> = 1 A I <sub>B</sub> = 0.2 A<br>I <sub>C</sub> = 2 A I <sub>B</sub> = 0.4 A<br>I <sub>C</sub> = 3 A I <sub>B</sub> = 0.6 A                                        |         |            | 1<br>1.1<br>1.2   | V<br>V<br>V |
| h <sub>FE</sub> *                | DC Current Gain                                           | I <sub>C</sub> = 10 mA V <sub>CE</sub> = 5 V<br>I <sub>C</sub> = 3 A V <sub>CE</sub> = 2.5 V                                                                                     | 10<br>6 | 10         | 14                |             |
| t <sub>s</sub><br>t <sub>f</sub> | INDUCTIVE LOAD<br>Storage Time<br>Fall Time               | I <sub>C</sub> = 2 A I <sub>B1</sub> = 0.4 A<br>V <sub>BE(off)</sub> = -5 V R <sub>BB</sub> = 0 Ω<br>V <sub>CL</sub> = 250 V L = 200 μH<br>(see figure 1)                        |         | 1.2<br>80  | 1.9<br>160        | μs<br>ns    |
| t <sub>s</sub><br>t <sub>f</sub> | INDUCTIVE LOAD<br>Storage Time<br>Fall Time               | I <sub>C</sub> = 2 A I <sub>B1</sub> = 0.4 A<br>V <sub>BE(off)</sub> = -5V R <sub>BB</sub> = 0 Ω<br>V <sub>CL</sub> = 250 V L = 200 μH<br>T <sub>j</sub> = 125 °C (see figure 1) |         | 1.8<br>150 |                   | μs<br>ns    |

\* Pulsed: Pulse duration = 300 μs, duty cycle 1.5 %


### Safe Operating Areas

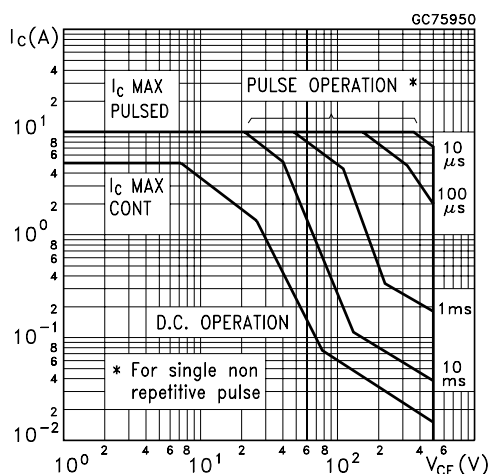


### Derating Curve

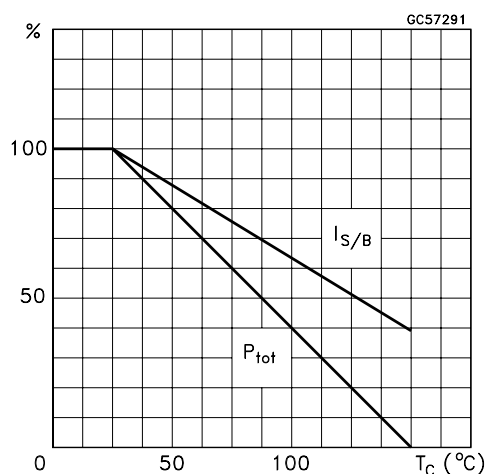


DC Current Gain

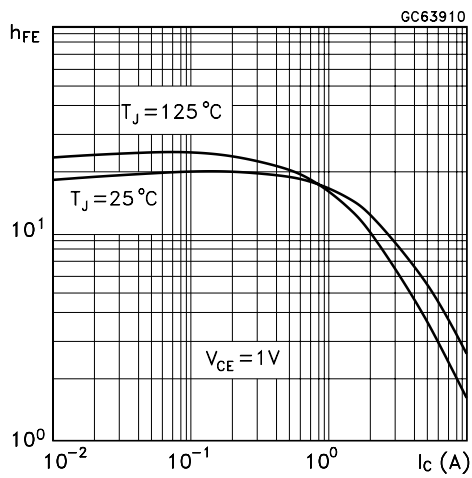


DC Current Gain

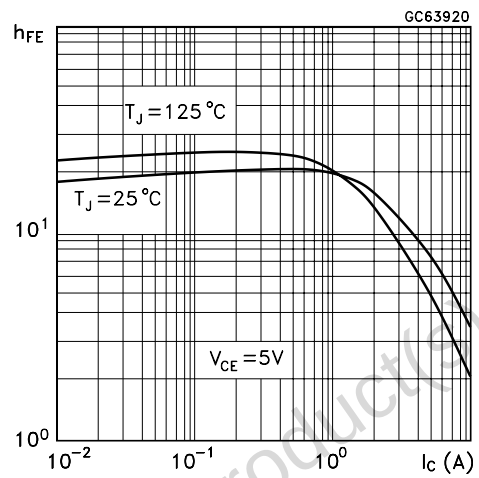


Collector Emitter Saturation Voltage

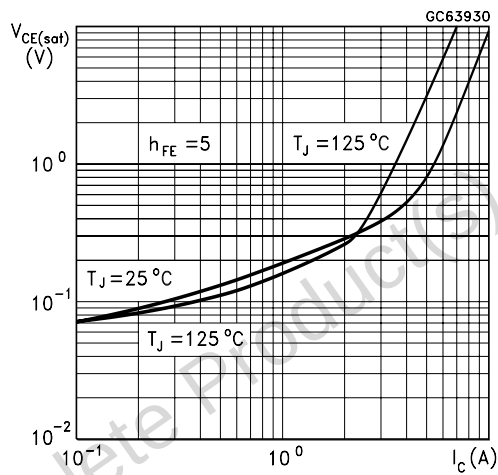


Base Emitter Saturation Voltage

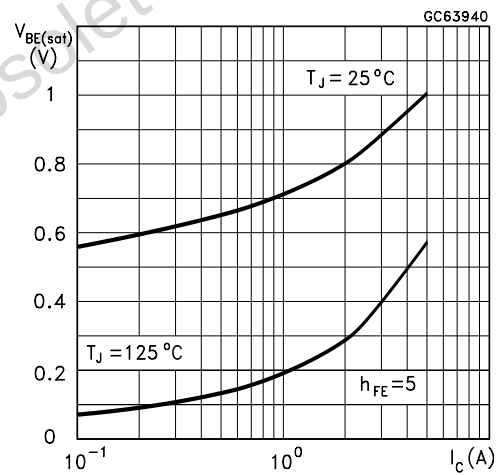

Inductive Load Fall Time

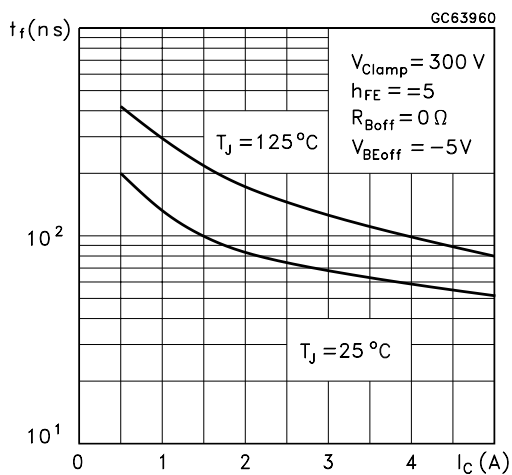

Inductive Load Storage Time

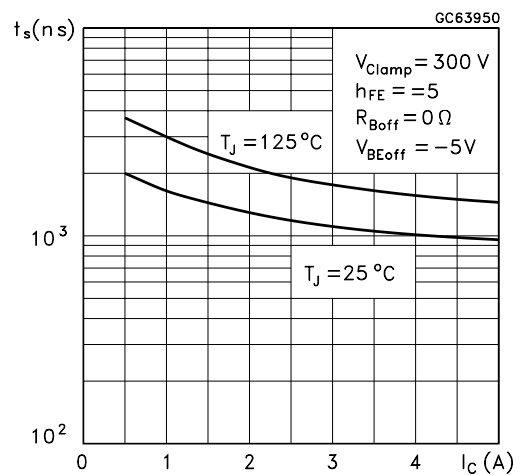

Reverse Biased SOA



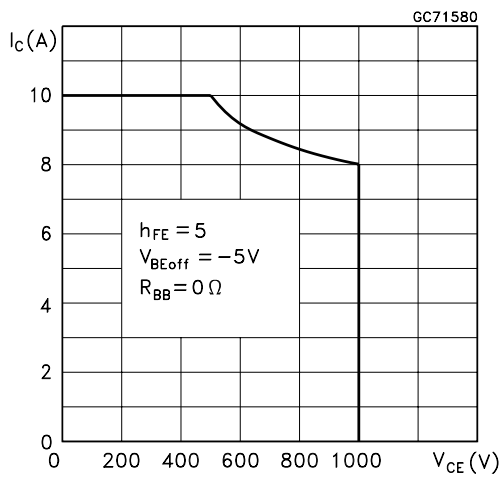


Figure 1: Inductive Load Switching Test Circuit

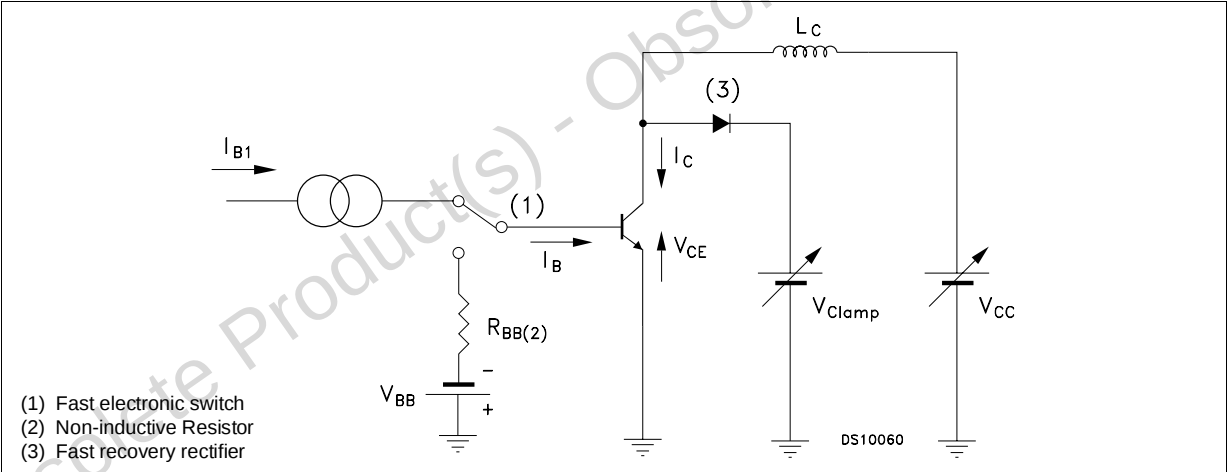

## TO-220FP MECHANICAL DATA

| DIM. | mm   |      |      | inch  |       |       |
|------|------|------|------|-------|-------|-------|
|      | MIN. | TYP. | MAX. | MIN.  | TYP.  | MAX.  |
| A    | 4.4  |      | 4.6  | 0.173 |       | 0.181 |
| B    | 2.5  |      | 2.7  | 0.098 |       | 0.106 |
| D    | 2.5  |      | 2.75 | 0.098 |       | 0.108 |
| E    | 0.45 |      | 0.7  | 0.017 |       | 0.027 |
| F    | 0.75 |      | 1    | 0.030 |       | 0.039 |
| F1   | 1.15 |      | 1.7  | 0.045 |       | 0.067 |
| F2   | 1.15 |      | 1.7  | 0.045 |       | 0.067 |
| G    | 4.95 |      | 5.2  | 0.195 |       | 0.204 |
| G1   | 2.4  |      | 2.7  | 0.094 |       | 0.106 |
| H    | 10   |      | 10.4 | 0.393 |       | 0.409 |
| L2   |      | 16   |      |       | 0.630 |       |
| L3   | 28.6 |      | 30.6 | 1.126 |       | 1.204 |
| L4   | 9.8  |      | 10.6 | 0.385 |       | 0.417 |
| L6   | 15.9 |      | 16.4 | 0.626 |       | 0.645 |
| L7   | 9    |      | 9.3  | 0.354 |       | 0.366 |
| Ø    | 3    |      | 3.2  | 0.118 |       | 0.126 |

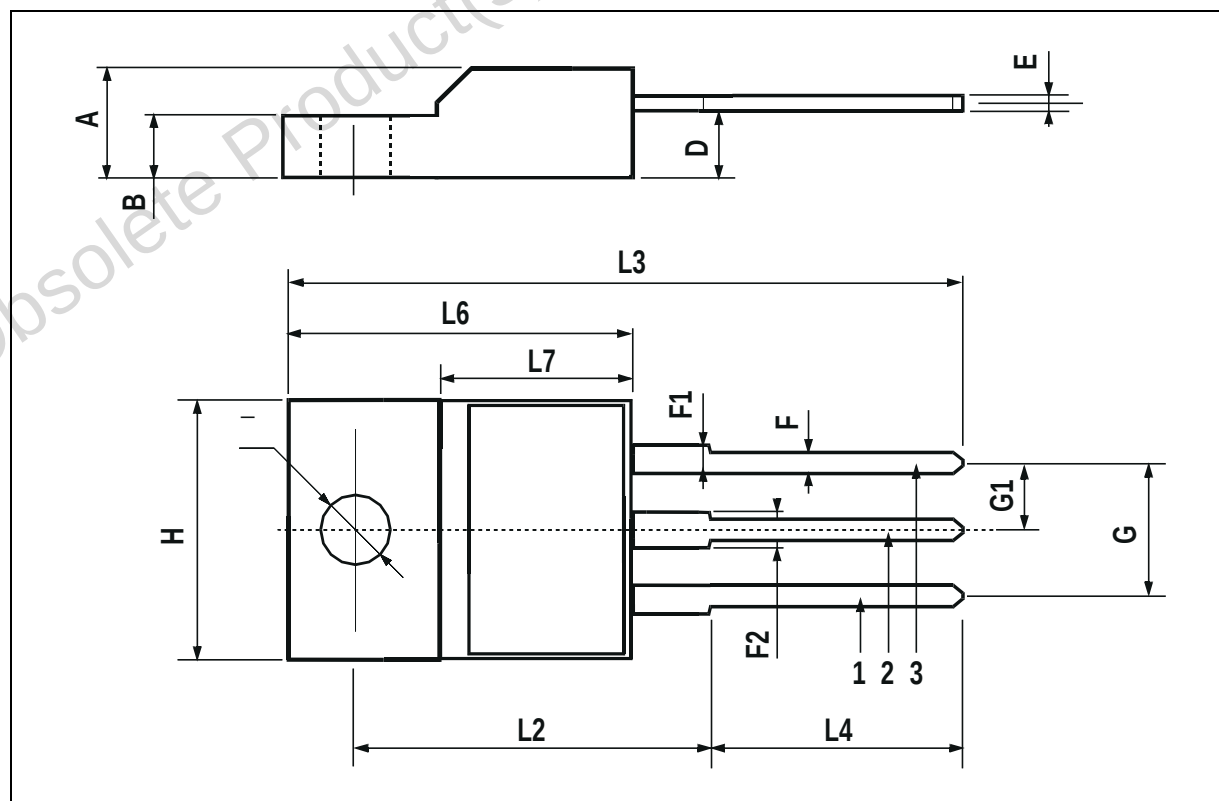

Obsolete Product(s) - Obsolete Product(s)

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 2003 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>